


DESCRIPTION

PROFESSIONAL GUN FOR POLYURETHANE FOAM

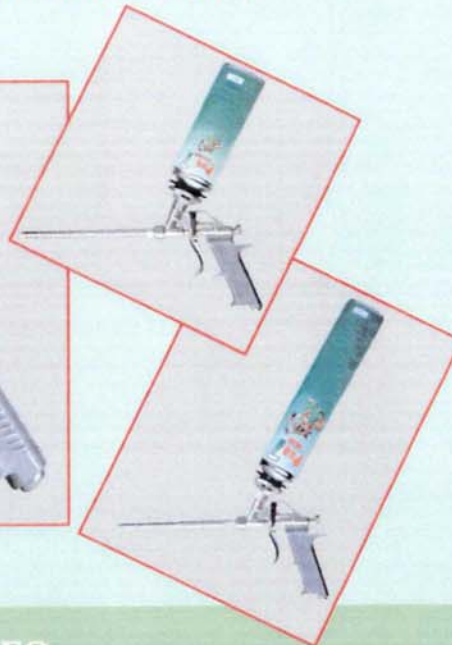

TECHNICAL INFO

PUR7 GUN can be used for most PU-foams in aerosol that are currently available on the market. PUR7 GUN makes it possible to control the dosage of the PU-foam, so joints can be filled precisely and doors and windows can be mounted on a safe and easy way.

A long spray nozzle that can even be extended, gives the possibility to also work on places that are difficult to reach.

PUR7 GUN can quickly and easily be cleaned with PUR7 CLEANER.

Article number: 670901000




ISO Certified Company
ISO 9001:2000
ISO 14001: 2004

NOVATECH NV
Industrielaan 5B
2250 OLEN
Belgium

Tel: +32 (0) 14 859737
Fax: +32 (0) 14 859738
E-mail: info@novatech.be
www.novatech.be


USEFUL HINTS AND SAFETY PRESCRIPTIONS



Check the gun for any defects before using it.
Shake the can well and remove the closing cap.
Screw the can quickly onto the gun's adapter. By acting quickly, you can prevent foam from leaking out and fouling the adapter. If any foam must have leaked out, it has to be removed immediately with PUR7 CLEANER. In order to use the can, press lightly on the trigger to fill the gun and the barrel with foam.
The gun is now ready for use.



The flow of the material is regulated on the rear of the gun.
Turn the flow regulator wheel clockwise to reduce the quantity of PU-foam and/or obtain a thinner layer.
Turn counter clockwise to increase the quantity of PU-foam and/or obtain a thicker layer.
This flow regulator wheel is indispensable to obtain optimal results.



In order to replace an empty can, unscrew it quickly from the gun.
Clean the adapter immediately.
If the can is not completely empty and will be used again, also the valve of the can must be cleaned. In both cases, PUR7 CLEANER has to be used.
For short working breaks the can can stay screwed on the gun and the flow regulator wheel has to be closed completely to seal the gun.
If the gun will not be used for a longer period of time, it has to be cleaned as follows:
- screw PUR7 CLEANER with screw fixing quickly on the gun.
- spray the cleaner until the gun is completely clean and a clear fluid comes out of the gun.
- also external foam residues have to be removed carefully with PUR7 CLEANER.



Due to changes in the viscosity of the foam it is possible that foam is released from the needle packing adjustment screw.
In this case remove the foam residues immediately with PUR7 CLEANER and fasten the needle packing adjustment screw with an open-end spanner (8 mm) clockwise.
This seals the (PTFE) packing in the gun and prevents leaking of the foam.
At the same time, also check if the needle can still move freely. If necessary, lubricate the needle of the packing.

Never aim the gun at yourself or other people!

The foam manufacturers safety regulations must always be respected!

In order to keep the gun working properly, follow the instructions for use and maintenance described above and handle the gun with care, otherwise the manufacturer declines any responsibility.

In case of malfunctioning, clean the gun at once and return it to the manufacturer.

Guns returned fouled with material, damaged or modified or guns with any other evidence of misuse will not be accepted as subject of a complaint. The manufacturer reserves the right to make any constructive changes, with the intention to improve the product.

ISO Certified Company
ISO 9001:2000
ISO 14001: 2004

NOVATECH NV
Industrielaan 5B
2250 OLEN
Belgium

Tel: +32 (0) 14 859737
Fax: +32 (0) 14 859738
E-mail: info@novatech.be
www.novatech.be